如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

	Basic data	SPS30000B
	Rated lifting moment	30 mt
	Rated lifting capacity	12000 kg 2.5 m
	Max. outreach	14.5 m
	Max. lines of the hook	6
	Slewing angle (continuous)	
	Boom raising angle	0~75°
( )	Max. lifting height(the measurement from the ground after the outriggers fully extended)	16.5 m
	Length of the basic boom	5.4 m
	Length of fully extended boom	14.8 m
	Boom sections	4
	Outrigger span(fully extended)	6.0 (m)
	Recommended volume for the system	70 L/min
	Operating pressure	26/28 Mpa
	Recommended oil tank capacity	200 L
	Crane moment (dynamic)	507.3 kNm 51.7 mt
	Torsional moment (dynamic)	30.0 kNm 3.1 mt

45 55

NOTE

The mentioned speed is the maximum value when the crane is operated without load and under the recommended volumn which with oil temperature 45 ~ 55 .

如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

	Crane weight	
SPS30000B-F	Floor Control SPS30000B-F	4200 kg
SPS30000B-H	High Seat SPSS30000B-H	4200 kg

NOTE
The weight of the mounting kit was not included in the mentioned crane weight.

如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

SPS30000B-F

Dimensions

Crane

NOTE
The low-seat is optional equipment.

如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

Dimensions

SPS30000B-H

Crane

NOTE
The low-seat is optional equipment.

起升高度

工作幅度（

85%

NOTE

The above lifting heights and boom angles are based on a straight (unladen) boom.
Allowance should be made for boom deflection under laden conditions.
Lifting capacities must not exceed 85% of tipping load.

如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

SPS30000B-F

Intallation dimension



如果变更，必须把制造公差考虑在内。
Subject to change,production tolerances have to be taken into account.

SPS30000BH

Intallation dimension

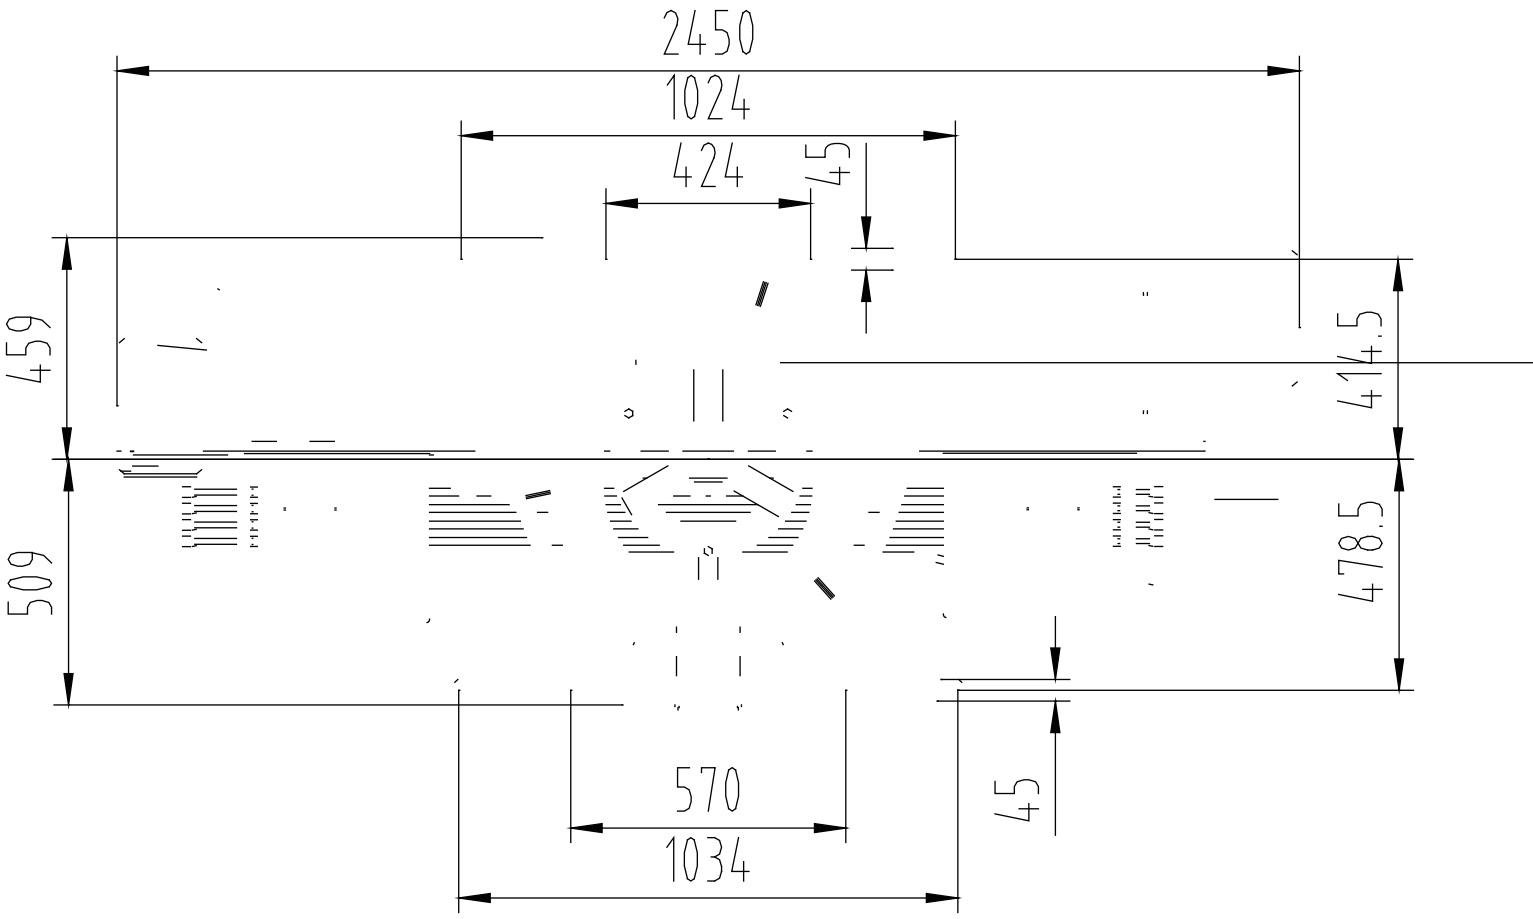

SANY PALFINGER

WWW.SANYPALFINGER.COM